



品质承认书 Quality specification

客户 Customer:		
供应商: 广东东溢新材料科技有限公司		
Supplier: GUANGDONG DONGYI HIGH-TECH MATERIAL SCIENCE&TECHNOLOGY CO., LTD.		
产品类型 Product type: 纯铝箔 Pure aluminum foil		
材料品名 Material name: DAH		
编号 No:A011 版本 Ver: A2		
制作日期 Date of production:2024/04/11		
客户确认 Customer:		
采购 Purchase:	品质 Quality:	工程 Engineering:
职务 Position:	职务 Position:	职务 Position:
备注 Note: (盖章 Seal)		
广东东溢新材料科技有限公司 GUANGDONG DONGYI HIGH-TECH MATERIAL SCIENCE&TECHNOLOGY CO., LTD.		
业务 Marketing: 赵礼雄	品质 Quality:陈伟志	技术 Technical:张正浩
职务 Position:总监	职务 Position:经理	职务 Position: 经理
备注 Note: (盖章 Seal)		

地址: 广东省中山市南区昌盛路 22 号/板芙镇智创路 1 号

Address: No. 22 ChangSheng Road South District, ZhongShan City, GuangDong Province/No.1 ZhiChuang Road, Banfu Town

电话 TEL: 0760-88892754 88895714 23336599

传真 FAX: 0760-23336558

此规格书为东溢公司机密文件且涉及专利保护事宜, 未经东溢公司书面签章确认同意严禁转载转发, 此规格书中所有条款内容最终解释权归东溢公司所有, 特此声明! Hereby declared that this technical datasheet is a confidential document of Dongyi and involves patent protection matters, reproduction and forwarding without the written permission of Dongyi Company is strictly prohibited, the final interpretation of all the terms and conditions in this technical datasheet belongs to Dongyi.

产品名称 Product name

序号 No	型号 Production Model	铝厚 (um) Copper thickness	包装规格 Packaging	备注 Remark
1	DAHL704	70	520mm*100m	
2	DAHL1004	100	520mm*100m	
3	DAHL1504	150	520mm*100m	
4	DARL2001	200	250mm*100m	

● 产品结构 Product Structure


铝箔 Pure

● 编码原则 Product coding principle

品名示意图如下 The diagram as follows:

注：□：表示英文字母 X：阿拉伯数字

例：DAHL2001

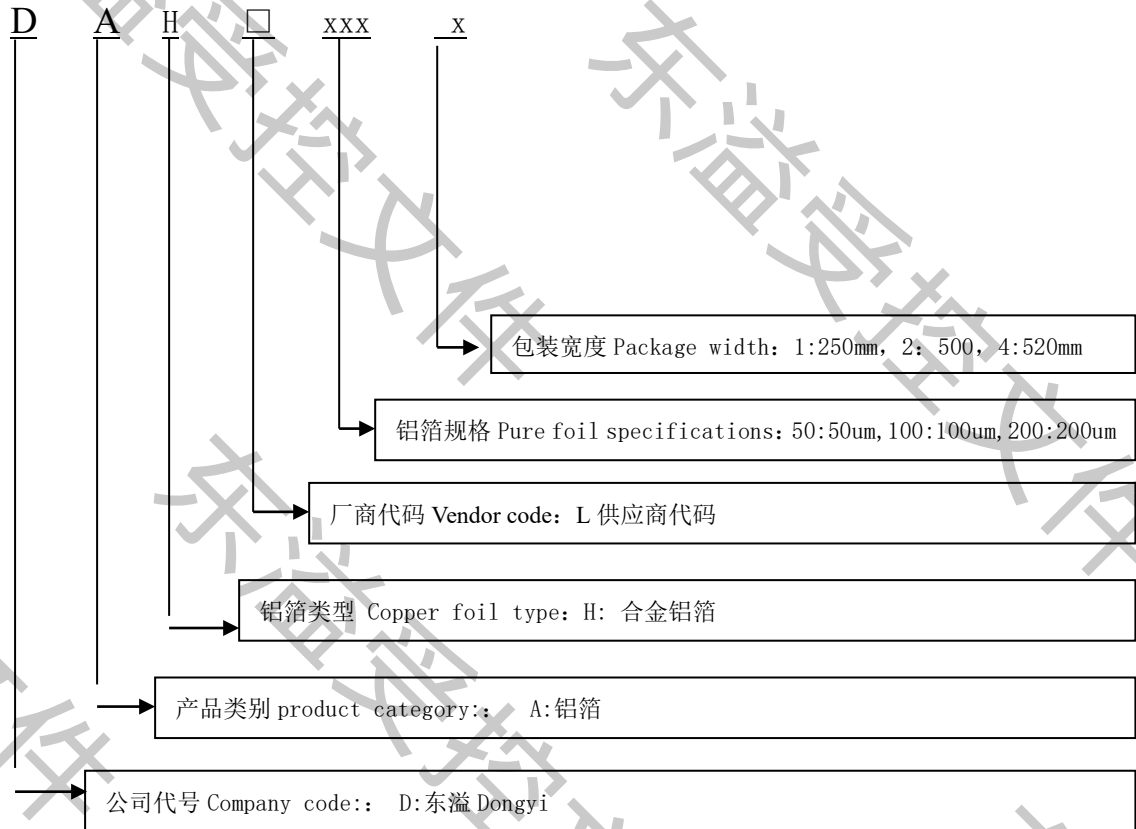

●物性指标 General Properti

项目	处理条件	单位	标准
1 厚度	常态	um	规格值± 5 %
2 幅宽	常态	mm	±2. 0mm
3 抗拉强度	常态	N/mm2	≥140
4 延伸率	常态	%	≤5
5 残油 (达因值)	常态	dyne/cm	≥50

● 外观管控 Appearance requirement

异常类型 Exception classes	异常大小 Abnormal size	允许个数 Allowed value (250*400mm)
杂质 Impurity	0.1~0.5mm	≤8 个 dots
垫伤 Pad injury	0.5~1mm	≤1 个 dots
气泡 Bubble	≥1mm	不允许 Not allowed
接头 Joint		≤1 个

注 Note: 产品边缘 3mm 以内异常, 不作管控要求 From the product within 3 mm of the edge of exception, don't do control requirements.

● 储存 Storage

铝箔要放到通风良好的建筑物内 (最好为 40℃ 以下, 湿度为 60% 以下的环境内, 在没有漏水的情况保质期外交货日起 6 个月。Aluminum foil in the well ventilated buildings (best for below 40 °C, humidity is 60% below the environment, in the no Leakage of foreign goods within 6 months shelf life.

● 包装 Packing

1. 每一卷成品用纸管卷取。每批出货的每个规格提供一份品质检验报告 Each volume of finished paper tube winding.
2. 每一卷成品用纸箱包装, 避免在运输上碰撞。产品采用防潮、干燥、密封包装, 成卷装入纸箱 Each volume of finished carton packaging, in the transport collision avoidance. Products using moistureproof, dry, sealed packaging, rolls into cartons.
3. 包箱标签 Package box label

无卤标签 Halogen free label: 环保标签 Green label: 合格标签 Inspection tag:



唛头 Shipping mark:

 广东东溢新材料科技有限公司 GUANGDONG DONGYI HIGH-TECH MATERIAL SCIENCE&TECHNOLOGY CO., LTD.	
<h3>纯 铝 箔</h3>	
订单号 Order:	
型号 Type:	
宽度 Width:	mm
长度 Length:	m
面积 Area:	m ²
接头 Splice:	m
批号 Lot. NO:	
生产日期 Production date:	
保质期至 Shelf life:	
储存环境 Storage:	<40℃, <60%RH



月份标签 Month label:

一月 Jan.	二月 Feb.	三月 Mar.	四月 Apr.	五月 May.	六月 June.	七月 July.	八月 Aug.	九月 Sept.	十月 Oct.	十一月 Nov.	十二月 Dec.
1	2	3	4	5	6	7	8	9	1	11	1

●使用注意事项 Matters needing attention

1. 如果客户制程没有温湿度管控，建议开料后的铝箔在所有制程流转中，加装在密封袋中保存，防止铝箔吸潮影响涨缩和氧化。If the client process there is no temperature and humidity control, suggested that cutting epoxy Pure foil in the process flow of system of ownership, add in a sealed bag, Prevent Pure foil moisture absorption from affecting shrinkage and oxidation

此规格书为东溢公司机密文件且涉及专利保护事宜，未经东溢公司书面签署确认同意严禁转载转发，此规格书中所有条款内容最终解释权归东溢公司所有，特此声明！Hereby declared that this technical datasheet is a confidential document of Dongyi and involves patent protection matters, reproduction and forwarding without the written permission of Dongyi Company is strictly prohibited, the final interpretation of all the terms and conditions in this technical datasheet belongs to Dongyi.

